


76233



NOTES

- Dimensions: 62" x 33" x 78-3/4" with flange Shipping Weight: 250 lbs. Certifications: ANSI Z124.2; NAHB
- Installation instructions included.
- All units shall have anti-skid floor treatment to meet performance requirements of ASTM F-462-78.
- Units conform to ANSI A-117.1 and ANSI Z-124.2; the shower also complies with the guidelines issued by ADA, US.
 Architectural and Transportation Barriers Compliance Board (A & T.B.C.B.) and with most city, state and national standards for barrier free, accessible shower facilities for the handicapped.
- Additional back reinforcement is added to provide code complying structural integrity and are sealed from the back side.
- On Model 76233S the factory supplied components to be included are one stainless steel wrap around grab bar and a fold up seat with white phenolic bench.

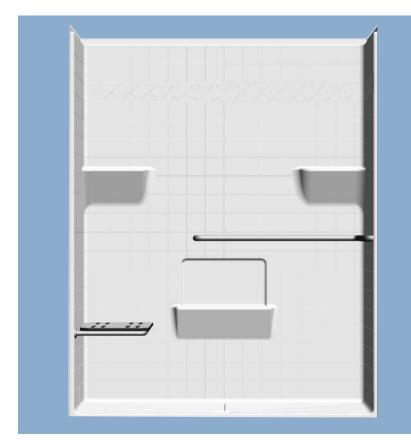

62" Roll-In Shower Low Threshold High Gloss Gelcoat Finish

FEATURES

• 76233 Connor

62" x 33" x 78-3/4" (nominal outside)

- One piece construction
- Simulated Tile
- Slip resistant floor

The unit is made of sanitary grade high gloss polyester gelcoat with reinforced composite matrix.






76233

62" Roll-In Shower Low Threshold

High Gloss Gelcoat Finish

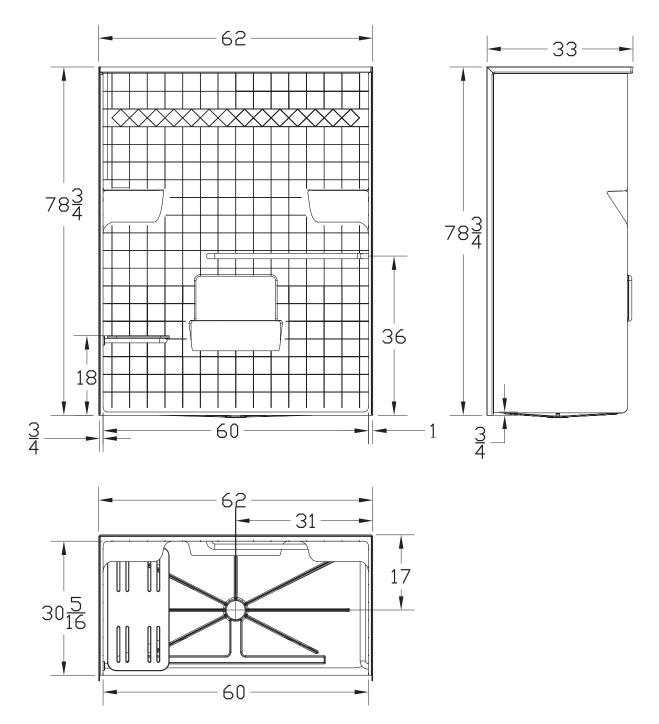

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets.

