





NOTES

- All units shall have anti-skid floor treatment to meet performance requirements of ASTM F-462-78.
- Units conform to ANSI A-117.1 and ANSI Z-124.2; the shower also complies with the guidelines issued by ADA, US. Architectural and Transportation Barriers Compliance Board (A & T.B.C.B.) and with most city, state and national standards for barrier free, accessible shower facilities for the handicapped.
- On Model 73838S the factory supplied components to be included are one stainless steel wrap around grab bar and a fold up seat.
- Factory installed components are provided with additional back reinforcements to provide code complying structural integrity and are sealed from the back side.
- · Curtain rod and shower curtain available. See option for price.

One Piece Barrier-Free Shower High Gloss Gelcoat Finish

FEATURES

• 74838 Sam

Available Colors: White, Bone

Shower module shall be additionally reinforced with 1/2" O.S.B. All units have an anti-skid floor treatment.

The unit shall be installed in a pit 1³/₄" deep so the finished floor will be level with the top of the threshold.

The unit shall have nominal outside dimensions of 48" x 37 1/4" and nominal inside dimensions of 45 3/4" x 36". Shimming is necessary. It is recommended that a floor drain at or near the entrance to the shower be included.

The unit is made of sanitary grade high gloss polyester gelcoat with reinforced composite matrix.










One Piece Barrier-Free Shower

High Gloss Gelcoat Finish

± 1/4" Variance

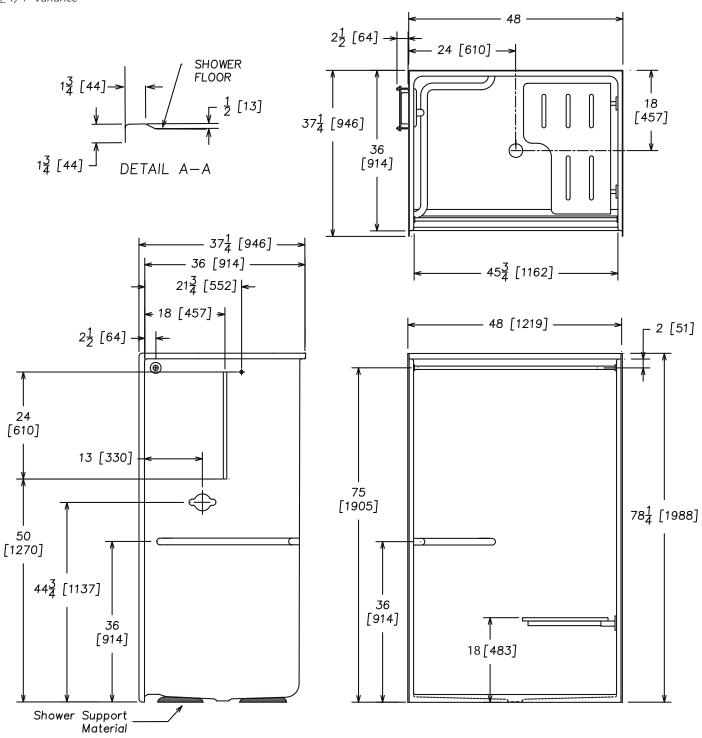

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets.

