



**One Piece Barrier-Free Shower** High Gloss Gelcoat Finish



## **NOTES**

- All units shall have anti-skid floor treatment to meet performance requirements of ASTM F-462-78.
- Units conform to ANSI A-117.1 and ANSI Z-124.2; the shower also complies with the guidelines issued by ADA, US. Architectural and Transportation Barriers Compliance Board (A & T.B.C.B.) and with most city, state and national standards for barrier free, accessible shower facilities for the handicapped.
- Factory installed components are provided with additional back reinforcements to provide code complying structural integrity and are sealed from the back side.
- On Model 73838S the factory supplied components to be included are one stainless steel wrap around grab bar and a fold up seat.
- Shower curtains also aviailable. See option for price.



## **FEATURES**

## • 73838 Nick

Available Colors: White, Bone

Shower module shall be additionally reinforced with 1/2" OSB. All units have an anti-skid floor treatment.

The unit shall be installed in a pit 1<sup>3</sup>/<sub>4</sub>" deep so the finished floor will be level with the top of the threshold.

The unit shall have nominal outside dimensions of  $38" \times 38^{3}/4"$  and nominal inside dimensions of  $36" \times 36"$ . Shimming is necessary. It is recommended that a floor drain at or near the entrance to the shower be included.

The unit is made of sanitary grade high gloss polyester gelcoat with reinforced composite matrix.







## One Piece Barrier-Free Shower

High Gloss Gelcoat Finish

± 1/4" Variance







73838 X/S MEETS ADA CODE

– 38 [965] —<del>></del>

 $38\frac{3}{4}$  [984]

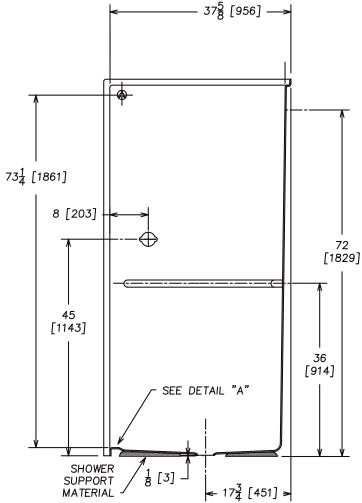

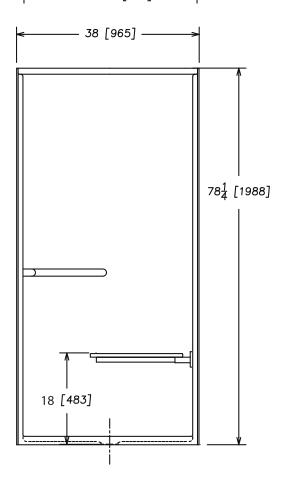

**IMPORTANT:** Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets.

